


Push-Infilare for main and secondary leaf

NEW

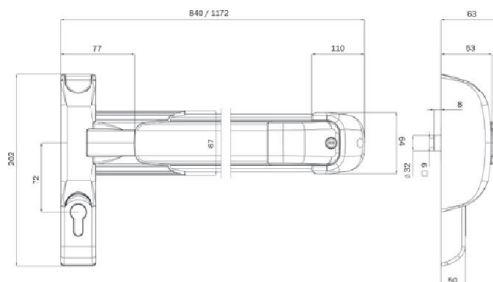

Push-Infilare panic exit device for FIRE RESISTANT doors, **FOR MAIN AND SECONDARY LEAF, REVERSIBLE**, to be used with a panic exit mortice lock and counterlocks with 9 mm handle follower. **CENTER DISTANCE 72 MM** with handle follower rotation **30°**.

Shortenable fixing plate allowing the assembly also without the cylinder.

Templates. Assembly instructions. SQUARE SPINDLE NOT INCLUDED.

CE EN1125 mark and ICIM product certification.

Accessories to be ordered separately:

Lock 2141**65* - Counterlock 2126**65*

Counterlock 2127**65* - Striking plate 032094

Accessories 0321*4

Microswitch 94200060

Square spindle 947910 - 947920 - 947930

Length mm 840. Chassis and bar painted METAL GREY	94F008477379	1	-	1	YES
Length mm 840. Chassis painted BLACK and bar painted RED	94F008458379	1	-	1	YES
Length mm 1165. Chassis and bar painted METAL GREY	94F011777379	1	-	1	YES
Length mm 1165. Chassis painted BLACK and bar painted RED	94F011758379	1	-	1	YES

Anti
GERM : antibacterial protection

Certifications



The ICIM certification as per EN 1125 is only valid if the operating bar in this page is used in conjunction with ISEO locks, striking plates, counterlocks and accessories as indicated in the next page. Whoever uses a certified panic exit device in conjunction with locks, counterlocks, accessories and/or striking plates different from the ones specified by ISEO shall be responsible for compliance with EN 1125.


All the updated certificates can be downloaded from our web site: www.iseoserrature.it

Push-Infilare for main and secondary leaf

NEW

The panic exit device for fire resistant doors with MORTICE LOCK FOR MAIN LEAF is made up of a horizontal bar which operates the locking mechanism through the handle follower. The operation of the bar causes the rotation of the handle follower, unlocks the lock and opens the door. Supplied in sizes mm 840 and 1165, shortenable to mm 330, reversible mechanism in metal grey or red/black finish for usage on right- or left-handed doors. All versions can be used with a microswitch that signals door openings. Shortenable fixing plate allowing the assembly also without the cylinder.

Bar	Lock	Striking plate
94F0084**379	2141**65*	032094
94F0084**379	214910654*	032094
94F0117**379	2141**65*	032094
94F0117**379	214910654*	032094

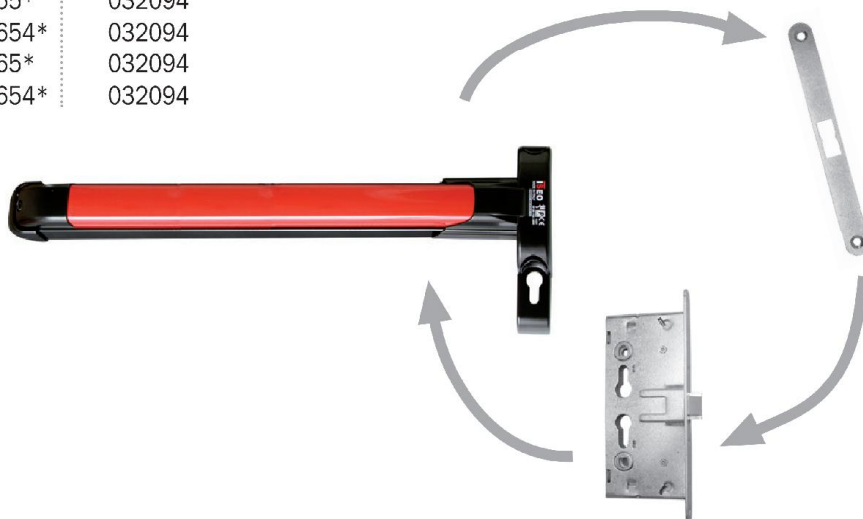

The panic exit device for fire resistant doors with MORTICE COUNTERLOCK FOR SECONDARY LEAF is made up of a horizontal bar which operates the locking mechanism through the handle follower. The operation of the bar causes the rotation of the handle follower of the counterlock, by which the upper and lower rod will move inside, the latchbolt of the panic exit lock in the main leaf will be released and both leaves can be opened. Supplied in sizes mm 840 and 1165, shortenable to mm 330, reversible mechanism in metal grey or red/black finish for usage on right- or left-handed doors. All versions can be used with a microswitch that signals door openings. Shortenable fixing plate allowing the assembly also without the cylinder.

Bar	Counterlock	Accessories
94F0084**379	2126**65*	0321*4
94F0084**379	2127**65*	0321*4
94F0117**379	2126**65*	0321*4
94F0117**379	2127**65*	0321*4

