

# Institutional stainless AISI 316L handle

Addressed basically to institutional and commercial buildings with high traffic and subject to extreme conditions. They are applicable to all kind of : RF doors, panic exit devices, fire doors, fixings for fixed through bolts, applications for double follower locks, etc.

## **Stainless steel AISI 316L finish**

It is an austenitic steel with molybdenum, low carbon content (18% chromium, 11% nickel, 2% molybdenum). Molybdenum protects stainless steel from pitting corrosion, which is common in industrial or seaside environments.

## **Features**

Recoil spring protected by an acetate resin cartridge for maximum corrosion resistance.  
Fixing with floating or fixed through bolts, for maximum traction

resistance.

Fixing with TESA expansion spindles, ensuring high traction resistance.

Hidden screws in order to avoid handles from being theft.

## **Regulations**

It meets the requisites of the UNE-EN 1906 standard for architectural fittings.

It is also way above the maximum grade of the corrosion resistance standard UNE-EN 1670.

Excellent resistance to chemical attacks.

## **Fixing system**

Depending on each model, fixing is carried out with fixed through bolts, floating through bolts, or coach screws straight onto the door's leaf.



# Institutional stainless AISI 316L handle

## Sena AISI 316L

### The pack with a rosette includes

- » A set of handles with an internal plate and a cover, a 8x105 mm spindle, 2 recoil springs, 4 coach screws, 2 bolts and an Allen key.

### The pack with a long plate includes

- » A set of handles with an internal plate and a cover, a 8x105 mm spindle, 2 recoil springs, 4 coach screws, 2 bolts and an Allen key.
- » Rectangular plate also available




### The pack with a squared plate includes

- » A set of handles with a 1'5 mm-thick internal plate and a cover, a 8x105 mm spindle, 2 recoil springs, 5 floating through bolts, 5 screws, 2 bolts and an Allen key.

### Functions

- » Entrance: keyhole at 85, 72, 70 and 47 mm.
- » Privacy: deadbolt at 85, 72, 70 and 47 mm.
- » Passage.

| Rosette           | Product code | Finishes                                 |
|-------------------|--------------|------------------------------------------|
| Rosette           | MS5R800      | IS16                                     |
| Rosette           | MMTFR800     | IS16 1/2 Fixed knob + CUADRAE            |
| Rosette           | MSTFR800     | IS16 1/2 Fixed knob + CUADRAE + 1/2 Sena |
| Rosette           | MTF5R800     | IS16 Double Fixed knob + 2 CUADRAE       |
| Long plate        | Product code | Finishes                                 |
| Passage           | MS5L800      | IS16                                     |
| Rectangular       | MS5LR800     | IS16                                     |
| Cylinder at 47 mm | MS0L847      | IS16                                     |
| Cylinder at 70 mm | MS0L870      | IS16                                     |
| Cylinder at 72 mm | MS0L872      | IS16                                     |
| Cylinder at 85 mm | MS0L885      | IS16                                     |
| Deadbolt at 47 mm | MSEL847      | IS16                                     |
| Deadbolt at 70 mm | MSEL870      | IS16                                     |
| Deadbolt at 72 mm | MSEL872      | IS16                                     |
| Deadbolt at 85 mm | MSEL885      | IS16                                     |
| Square plate      | Product code | Finishes                                 |
| Pasagge           | MS5C800      | IS16                                     |
| Cylinder at 47 mm | MS0C847      | IS16                                     |
| Cylinder at 70 mm | MS0C870      | IS16                                     |
| Cylinder at 72 mm | MS0C872      | IS16                                     |
| Cylinder at 85 mm | MS0C885      | IS16                                     |
| Deadbolt at 47 mm | MS3C847      | IS16                                     |
| Deadbolt at 70 mm | MS3C870      | IS16                                     |
| Deadbolt at 72 mm | MS3C872      | IS16                                     |
| Deadbolt at 85 mm | MS3C885      | IS16                                     |

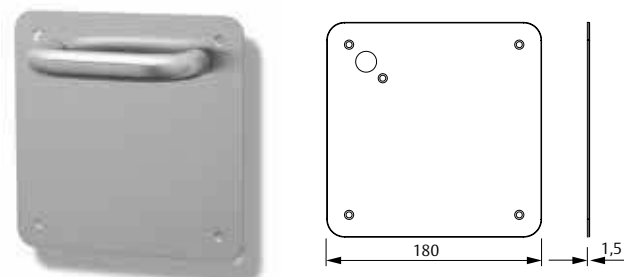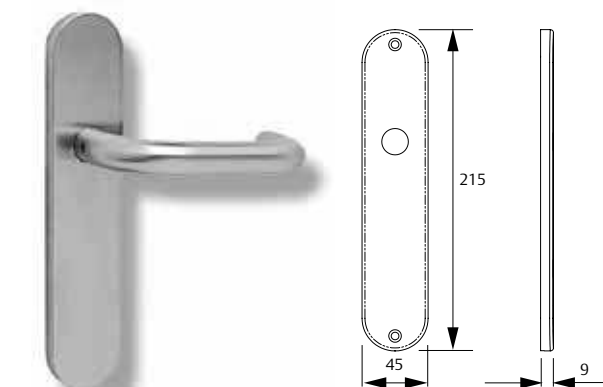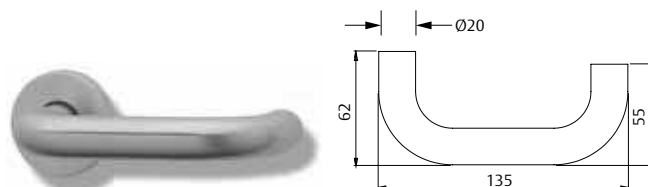

G