

Push type panic exit devices

Mortice Model. Single doors.

EN 1125 certificate in the 3 configurations: 1970 + CF60T, 1970 + 2035T/ 4039T/ 2037F and 19709G9 + 2230PA / 2240BA.

3 6/7*** 6 B/0* 1 3 2 2 A A/B**

* B: valid for fire rated doors: CF60 – 2035T – 2037F – 4039T

* 0: not valid for fire rated doors: 2240BA – 2230PA

** A: CF60 – 2035T – 2037F – 4039T

** B: 2240BA – 2230PA


*** 6: 2240BA – 2230PA / 7: CF60 – 2035T – 2037F – 4039T

1- Panic device

The box includes:

- » 1 oval shape horizontal bar 900 mm in length.
- » 1 main support and 1 auxiliary support.
- » 1 inner plate (Ref. E19711NNE) to be used only with CF60 lock serie
- » Assembly instructions and installation template.
- » Accessories:
 - Fixing screws
 - Screws witch support the horizontal bar.
 - A plastic hub cap (to be placed with the inner plate)
 - Squares spindles:
- » Panic device with 8 mm follower:
 - Double screwed square spindle 8/8 + 8/8.
- Panic device with 9 mm follower:
 - Double screwed square spindle 9/9 + 9/9.

2. Locks

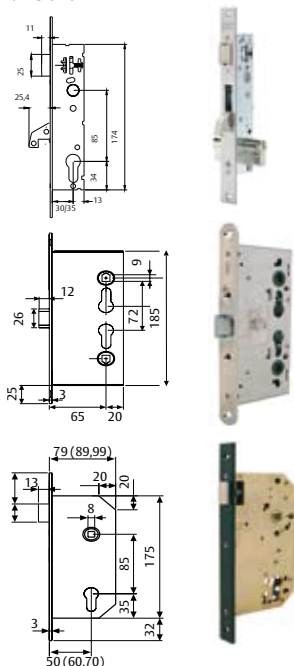

2240BA. Single point. 8 mm follower. Handed.

2230PA. Multipoint. 8 mm follower. Non-handed.

Solutions valid for single leaf door.

CF60T. 9 mm follower
Reversible

2035T. 8 mm follower. Handed.

No cylinder, for free passing door

2037F. 8 mm follower reversible (non handed). Valid for outside handle locking cylinder

4039T. 8 mm follower. Handed.
Cylinder required for external door opening.



3. Outside devices

The outside device must be selected depending on the type of lock. Two models are available: one for CF60T lock and the other suitable for 2035T, 2037F and 4039T.

Standard follower operation (CF60T, 2035T, 2037F and 4039T).

Model	Bar length	Square spindle mm	Cover finish mm	Bar finish	Product code
1970	900	8	Black	Green	1970908NV
1970	900	8	Black	Black	1970908NN
1970	900	8	Black	Red	1970908NR
1970	900	8	Black	Chrome plated	1970908NC
1970	900	8	Black	Stainless steel	1970908NI
1970	900	8	Nickel plated	Chrome plated	1970908SC
1970	900	8	Nickel plated	Stainless steel	1970908SI
1970	900	8	Stainless steel	Stainless steel	1970908II
1970	900	8	Silver	Silver	1970908PP
1970	900	8	Brass plated	Brass plated	1970908LT

Highlighted part numbers: "Express 5" service.

45° follower operation (2230BA and 2240PA).

Model	Bar length	Square spindle mm	Cover finish mm	Bar finish	Product code
1970	900	9	Black	Green	19709G9NV
1970	900	9	Black	Black	19709G9NN
1970	900	9	Black	Red	19709G9NR

4. Cylinders

Any type of TESA cylinder can be used, facilitating the Masterkeying. Cylinder length will depend on the lock position and the door thickness.

5. Squares spindles

1970 panic device model include:

Panic device with 8 mm follower:

- » Double screwed square spindle 8/8 + 8/8.
Ref. CD2030S8M

Panic device with 9 mm follower:

- » Double screwed square spindle 9/9 + 9/9.
Ref. CD9X559X67